

Fulflo® Single Cartridge Filter Vessels

■ Carbon Steel

Single Cartridge Filter Vessel Series

Fulflo® “B” Series Filters Are Suitable for a Wide Range of Industrial Applications

Carbon Steel “B” Vessels feature single center bolt for quick cartridge changing and in-line connections for easy installation.

Duplex vessels permit independent or parallel shell operation. In addition, they offer the advantage of continuous service because one can be serviced while the other is operating. Manifold vessels work simultaneously in parallel shells to provide higher flow rates with less pressure drop than single-shell models.

Air and gas single-shell vessels feature in-line pipe connections for easy installation and aluminum baffel sleeve deflectors for two-stage moisture removal.

Applications

- Petrochemicals
- Solvents
- Coolants
- Potable Liquids
- Hydraulic Oils
- Compressed Air
- Process Water



Features and Benefits

- Single center bolt for quick cartridge change.
- In-line pipe connection for easy installation.
- Optional integrally cast brackets for easy mounting.
- Drains and vents standard on all models.
- Standard Buna-N closure gasket material with optional Viton,* Neoprene and fluoropolymer gaskets available.
- Spring-loaded bottom seats for positive cartridge sealing.
- Duplex vessels for continuous service.
- Manifold unit for increased flow.



Process Filtration Division



■ “B” Series Description

■ Bracketed Head Dimensions (in)

	NPT 1/4 (in)	NPT 3/4 (in)
A	4.22	4.22
B	2.75	3.31
C	1.50	2.19
D	1.50	1.88
E	1.0	1.38
F	1.25	1.66
G	4.19	4.31
H	2.13	2.13

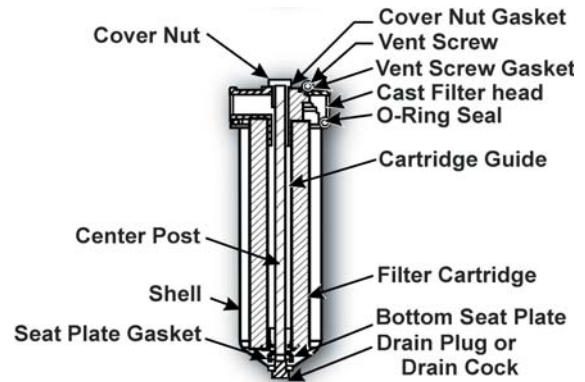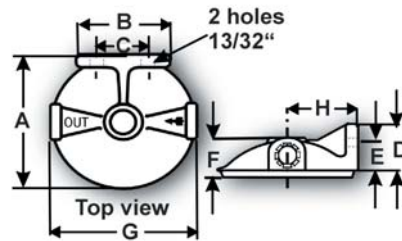

■ Duplex (BDX1) and Manifold (BMCX2) Design Specifications

Model	Typical Aqueous Flow* (gpm)	(Number) & Length of Cartridges (in)	Pipe Size (NPT) (in)	Maximum Operating Pressure (psi@200°F)	Overall Height (in)	Shipping Weight (lbs)
BDX1-10-1 1/2 SD	5/10	(2) 10	1/2	150 psi (10.3 bar)***	13.75	16
BMCX2-10-1 SD**	10	(2) 10	1	150 psi (10.3 bar)***	13.63	14

* Actual flow rate is dependent on fluid viscosity, micron rating, contaminant and media type. Consult nomographs or flow curves for each application.
 ** Two shells in parallel. No bracket required.
 *** Maximum available working pressure is 100 psi (6.9 bar) at 250°F (121°C).

■ Design Specifications

Model	Rated Capacity*	(Number) & Length of Wound Depth Cartridges (in)	Operating Pressure (psi@200°F)	Overall Height (in)	Outside Diameter (in)	Face-to-Face Dim. (in)	Pipe Size (NPT) (in)	Shipping Weight (lbs)
Air and other gases								
B3A-(1/4 or 3/8)SD	65 scfm	(1) 3	125 psi (8.6 bar)	7.0	3.63	4.19	.25 - .38	3.0
B5A-(1/2 or 3/4)SD	110 scfm	(1) 5	125 psi (8.6 bar)	9.25	3.63	4.31	.5 - .75	3.75
B7A-(3/4 or 1)SD	150 scfm	(1) 7	125 psi (8.6 bar)	11.38	3.63	4.5	.75 - 1	5.25
AF7-3/4SD	180 scfm	(1) 7	150 psi (10.3 bar)†	11.38	3.63	4.31	.75	4.25
Liquids								
B10-3/4 SD	5 gpm	(1) 10	150 psi (10.3 bar)††	12.88	3.63	4.31	.75	6.0
B20-3/4 SD	10 gpm	(1) 20	150 psi (10.3 bar)††	23.0	3.63	4.31	.75	9.25
B10-1 SD	5 gpm	(1) 10	150 psi (10.3 bar)††	13.25	3.63	4.5	1.0	6.0
B20-1 SD	10 gpm	(1) 20	150 psi (10.3 bar)††	23.25	3.63	4.5	1.0	9.25

* Maximum flow rate for gases based on air at 70°F (21°C) and maximum operating pressure with initial pressure loss of 3 psig (.2 bar) with a 5µm viscose wound depth filter cartridge.
 † Maximum allowable working pressure is 250 psi (17.2 bar) at 100°F (38°C).
 †† Maximum allowable working pressure is 100 psi (6.9 bar) at 250°F (121°C).

Ordering Information

B	20	3/4	S	D
Design Series	Cartridge Length (in)	Connection Size (in)	Spring-Loaded Seal	Drain
B = Carbon Steel	3 A	1/4		
BDX1 = Duplex	5 A	3/8		
AF = Air	7 (AF only)	1/2		
	7 A	3/4		
	10	1		
	20			

Note: B3A, B5A and B7A vessels supplied with 10 µm Fulflo wound cotton Cartridge

* A trademark of E. I. duPont de Nemours & Co.

Process Filtration Division

Parker Hannifin Corporation
 Process Filtration Division
 6640 Intech Boulevard
 Indianapolis, Indiana 46278
 Toll Free 1-888-238-5356
 Telephone (317) 275-8300
 Fax (317) 275-8410
<http://www.parker.com/processfiltration>

