

# The Light, Compact Oil Filtration Solution

The Fulflo® FPM Vessel Series of Single Cartridge Oil Filters is designed for high efficiency and economical operation in oil reclamation and maintenance applications. The compact, lightweight design makes the FPM vessel series easy to mount on equipment and on the floor to conserve space. A patented\* safety-latch design prevents inadvertent separation of the head from the shell in the event of improper venting prior to clamp removal.

The FPM Vessel Series is designed for use with the Fulflo® Flo-Pac® 718 and 736 filter cartridge series and TruBind 700 Series absorbent cartridges.

## Applications

- Hydraulic Oils
- Quench Oils
- Engine & Compressor Lube Oils
- Cutting Oils
- Coolants
- EDM Liquids

### Features and Benefits

- Split-shell construction with V-band clamp permits easy cleaning and cartridge change out.
- Vessel construction designed for 100 psi (6.9 bar) working pressure at temperatures of up to 200°F (94°C).
- Buna-N O-ring seal provides positive sealing.
- Standard Buna-N seal with optimal Viton\*\* elastomer, neoprene, ethylene propylene rubber and fluoropolymer elastomer O-rings.

# Fulflo<sup>®</sup> FPM Oil Filter Vessels

■ Steel




# **Process Filtration Division**

Bulletin C-4020 Eff. 8/97, Rev. 8/02 © 2000 Parker Hannifin Corporation All Rights Reserved Page 1 of 2

WARNING! FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.
This document and other information from Parker Hamilin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products requires. It is unportant that you analyze all aspects of your applications through through its own analysis and testing, is solely responsible for making the final selection for the products adsystems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hamrifin Corporation and its subsidiaries at any time without notice.




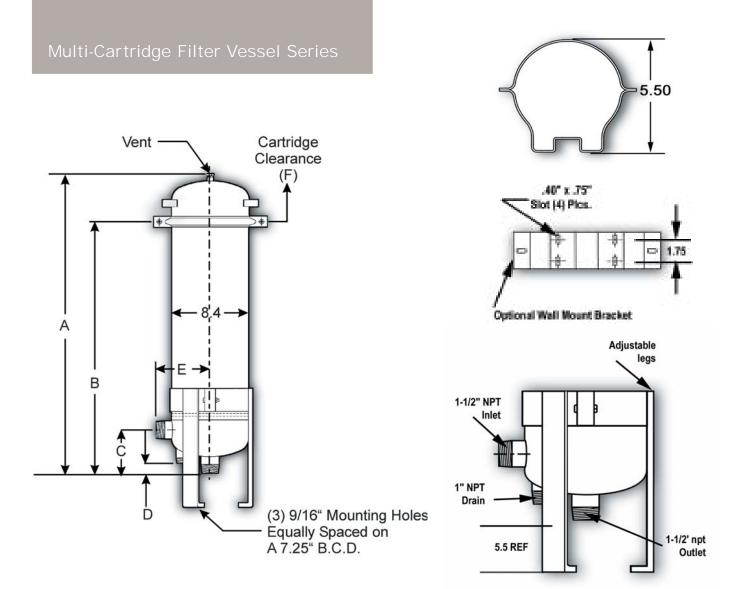

### Design Specifications for Units With Legs

Model	No. & Length of Cartridges <i>(in)</i>	Dimensie A	ons <i>(in)</i> B	С	D	E	F	Shipping Weight <i>(Ibs)</i>
FPM1-1.5	(1) 18	32.81	27.56	4.75	1.13	5.88	16.00	55
FPM2-1.5	(1) 36	50.81	45.56	4.75	1.13	5.88	16.00	70

### Ordering Information

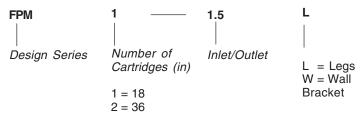

\* U. S. Patent No. 4,660,779

\*\* A trademark of E. I. du Pont de Nemours & Co.

Bulletin C-4020 Page 2 of 2

# Process Filtration Division

Parker Hannifin Corporation Process Filtration Division 6640 Intech Boulevard Indianapolis, Indiana 46278 Toll Free 1-888-238-5356 Telephone (317) 275-8300 Fax (317) 275-8410 http://www.parker.com/processfiltration

